



DL-301/DL-302/DL-303

CO/CO2/Temperature/Humidity/Dew Point Data Logger

Features

- Simultaneous Display for CO, CO2, Temperature, Humidity and Dew Point
- Measurement Range
 - CO: 0 ~ 1000 ppm
 - CO2: 0 ~ 9999 ppm
- Non-dispersive Infrared (NDIR) CO2 Sensor
- 2.8" LCD Touch Screen
- Able to store up to 450,000 records with date and time stamps
- Touch-screen and Web-based Configuration Interface
- Free Software Utility, iOS APP and Android App Included
- Able to Display Multilingual Messages on the Screen
- Supports the DCON, Modbus RTU, Modbus TCP and MQTT Protocols
- Includes RS-485/Ethernet/PoE Communication Interfaces
- Relay Output for Audible/Visual Alarm or IAQ Device Control
- Desktop, DIN-Rail or Wall Mounting




Introduction

The DL-300 series of Data Logger devices can be used to record CO, CO2, Temperature, Humidity and Dew Point information, including date and time stamps, and are able to store up to 450,000 downloadable records.

Real-time data can be accessed from the DL-300 Data Logger from anywhere and at any time using the free Windows software, the iOS App or the Android App, as long as they are connected to the same local network as the Data Logger.


Support is provided for popular industrial protocols such as DCON, Modbus RTU, and Modbus TCP, as well as the emerging machine-to-machine (M2M)/IoT (Internet of Things) connectivity protocol – MQTT. The DL-300 Data Logger can be connected via widely used communication interfaces including RS-485, Ethernet and PoE, meaning that the device can be easily integrated into existing HMI or SCADA systems, and is easy to be maintained in a distributed control system.

Large 2.8" LCD Touch Screen, with clear Color Chart to indicate the CO/CO2 Level

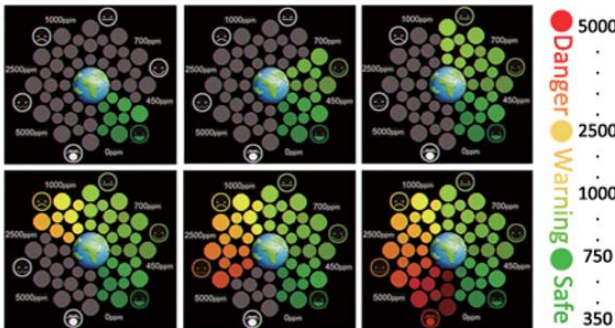


Free and Power DL300 Utility Software

The DL300 Utility can be used to configure the modules, monitor real-time data, group DL-300 modules so that the status of distribution groups can be viewed and managed. The utility also allows the log data to be downloaded and exported to a .CSV file that can then be imported into any industry-standard software or spread sheet for analysis.

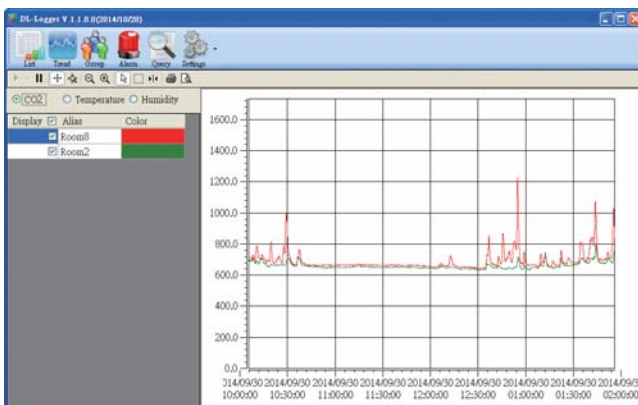

Supports the MQTT Protocol for IoT Applications

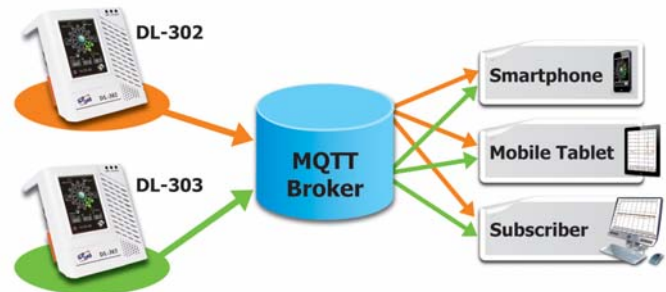

Multi-platform Remote Access Software

Real-time data from the DL-300 Data Logger can be accessed from anywhere and at any time using the DL300 Utility, the iOS or Android App, or via a regular web browser, as long as they are connected to the same local network as the Data Logger.



Display Messages in Multiple Languages


The display-message-on-screen function supports multiple language character sets based on UTF-8 encoding. Either pre-configured messages or dynamic messages can be remotely displayed using Modbus commands, or a dynamic message can be sent via the web-based interface.



Applications



- Transportation of Food or Pharmaceuticals
- Food and Beverage Industry (HACCP)
- Blood Stations and Pharmacies
- Building and Energy Management
- Warehouse Management
- Museums, Archives and Galleries

Specifications


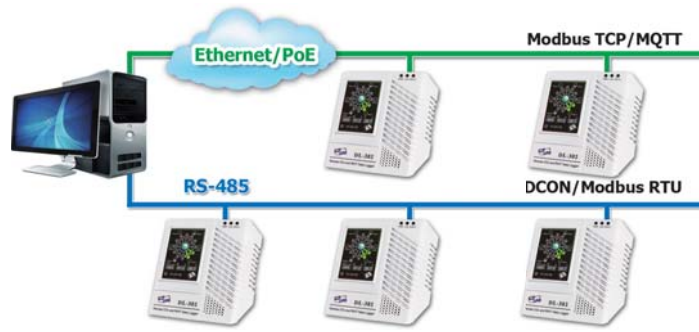


Model	DL-301	DL-302	DL-303
Software			
Built-in Web Server		Yes	
CPU Module			
Real Time Clock		Yes	
Display			
Backlight Life		20,000 hours	
Brightness		160 cd/m ²	
Touch Panel		Yes	
LCD Information Displayed	2.8 TFT (Resolution 240 x 320 x 16), Defective Pixels <= 3		
Temperature Measurement			
Range		-10 ~ +50°C	
Resolution		0.1°C	
Accuracy		±0.6°C	
Humidity Measurement			
Range		0 ~ 100% RH	
Resolution		0.1% RH	
Accuracy		±5% RH	
Dew Point			
Range	Calculated using temperature and relative humidity		
Resolution	0.1°C		
CO Measurement			
Range	0 ~ 1000 ppm (Electrochemical)	-	0 ~ 1000 ppm (Electrochemical)
Resolution	1 ppm	-	1 ppm
Accuracy	±5% of measured value	-	±5% of measured value
Response Time	30 seconds	-	30 seconds
Warm-up Time	300 seconds	-	30 seconds
CO2 Measurement			
Range	-	0 to 9999 ppm (NDIR)	
Resolution	-	1 ppm	
Accuracy	-	±30 ppm ±3% of measured value	
Response Time	-	20 seconds	
Warm-up Time	-	60 seconds	
System			
Real Time Clock		Yes	
Data Logger		Yes, up to 450,000 records	
Relay Output			
Type		Form A × 1, SPST	
Contact Rating		30 VDC @ 16 A or 250 VAC @ 16 A	
COM Ports			
Ports		1 x RS-485	
Baud Rate		1200 ~ 115200 bps	
Protocol		DCON, Modbus/RTU	
Ethernet			
Ports	1x 10/100 Base-TX (Auto-negotiating, Auto-MDI/MDIX, LED indicators)		
PoE	Yes		
Protocol	Modbus/TCP, MQTT		
Power			
Consumption	PoE: 1.84 W (Max.) Non-PoE: 1.74 W (Max.)	PoE: 2.65 W (Max.) Non-PoE: 2.14 W (Max.)	PoE: 2.83 W (Max.) Non-PoE: 2.24 W (Max.)
Powered from PoE	IEEE 802.3af, Class 1 (48 V)		
Powered from Terminal Block	+12 ~ +48 VDC		
Dimensions (mm)			
Dimensions (L x W x H)	106 x 114 x 56 (W x L x H)		
Installation	Desktop, DIN-Rail or Wall Mounting		
Environment			
Operating Temperature	0 to +50°C		
Storage Temperature	-30 to +75°C		
Humidity	10 to 90% RH, Non-condensing		


Pin Assignments & Wire Connections

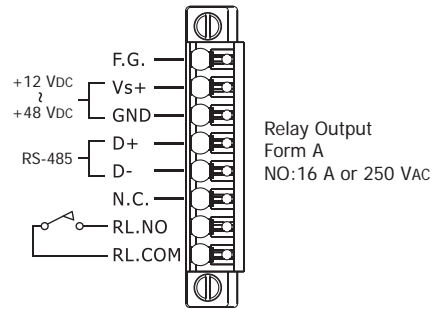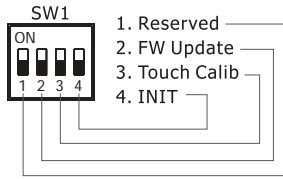

Appearance

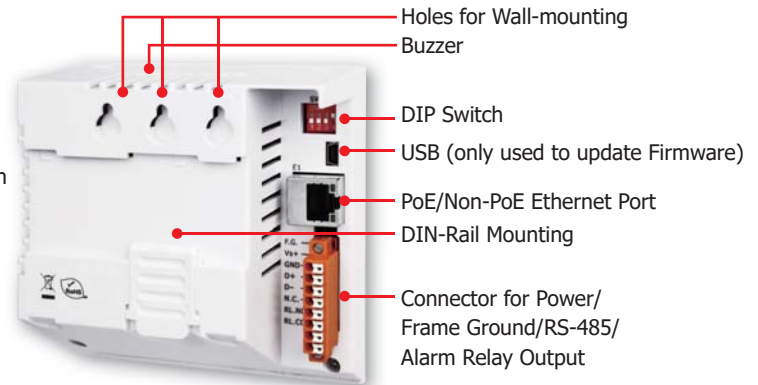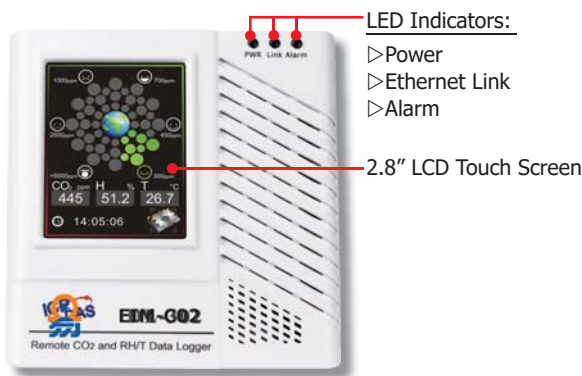

Dimensions (Units: mm)

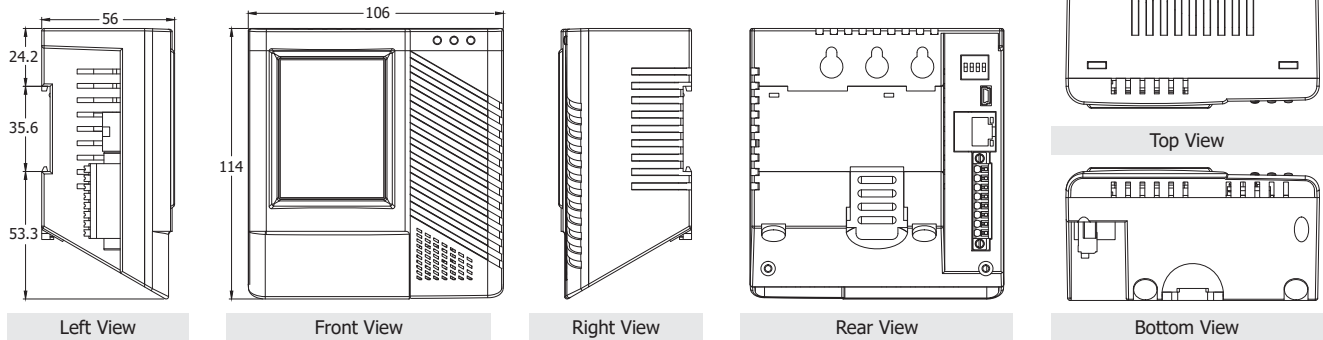

Ordering Information

DL-301 CR	Remote CO/Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE) (RoHS)
DL-302 CR	Remote CO ₂ /Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE) (RoHS)
DL-303 CR	Remote CO/CO ₂ /Temperature/Humidity/Dew Point Data Logger with Safety Alarm (RS-485, Ethernet, PoE) (RoHS)

Accessories

NS-205 CR	Unmanaged 5-port Industrial Ethernet Switch. 24 Vdc Input (RoHS)
NS-205PSE CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink connectors. 48 Vdc Input (RoHS)
NS-205PSE-24V CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink connectors. 24 Vdc Input (RoHS)

MDR-20-24 CR	24V/1A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
MDR-60-48 CR	48V/1.25A, 60 W Single Output Industrial DIN Rail Power Supply (RoHS)
tM-7561 CR	USB to Isolated RS-485 Converter (RoHS)