

QBiX-DR-EHLA6412H-A1

DIN Rail industrial system with Intel® Celeron® J6412 Processor



Features

- System Size : 160W x 118D x 62.6H(mm)
- Intel® Celeron® J6412 Processor
- Single Channel DDR4 3200 MHz
- 4 x COM Ports (RS-232/422/485 & RI/5V/12V)
- 1 x GPIO Port (8 Bits)
- 2 x GbE LAN Ports


Specifications

Dimension	System Size : 160W x 118D x 62.6H (mm)
CPU	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.60 GHz TDP 10W
Memory	1 x DDR4 SO-DIMM socket, Max. Capacity 32 GB Support Single Channel DDR4 3200 MHz memory modules
Ethernet	2 x GbE LAN Ports (Intel® I210AT)
Graphic support	Integrated Graphics Processor- Intel® UHD Graphics for 10th Gen Intel® Processors: 1 x HDMI 2.0 port, supporting a maximum resolution of 4096x2160 @60Hz 1 x VGA port, supporting a maximum resolution of 1920x1200 @60Hz (2 independent display outputs)
Audio	Realtek® Audio codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x 3052/3042 M.2 B key with SIM Slot – 4G/5G Support 1 x Vertical USB 2.0
Front I/O	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 2 x USB 2.0 1 x HDMI 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 1 x Power button with LED 1 x WiFi/HDD LED 1 x Remote control connector 1 x Headphone Jack 1 x External Antenna Hole (Optional)
Rear I/O	1 x Din Rail Mounting Support
Side I/O	1 x GPIO (8 bits) 1 x 3-pin Terminal Block 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x External Antenna Holes (Optional)
Power	+9V~36VDC (Full Range)
Operation temperature	Operating temperature: 0°C to 50°C Operating humidity: 0-90% (non-condensing) Non-operating temperature: -40°C to 85°C Non-operating humidity: 0%-95% (non-condensing) Use wide temperature range memory and storage
Vibration During Operation	Operation: IEC 60068-2-64, 3 Grms, random, 5 ~ 500 Hz, 1 hr / Per Axis, With SSD/M.2 2280 Non-operation: IEC 60068-2-6, 2 G, Sine, 10 ~ 500 Hz, 1 Oct/min, 1 hr / Per Axis
Shock During Operation	Operation: IEC 60068-2-27, 50 G, half sine, 11 ms duration, With SSD

GIGAIPC reserves the right to modify or change technical data without prior notice.

Dimension

Unit: mm

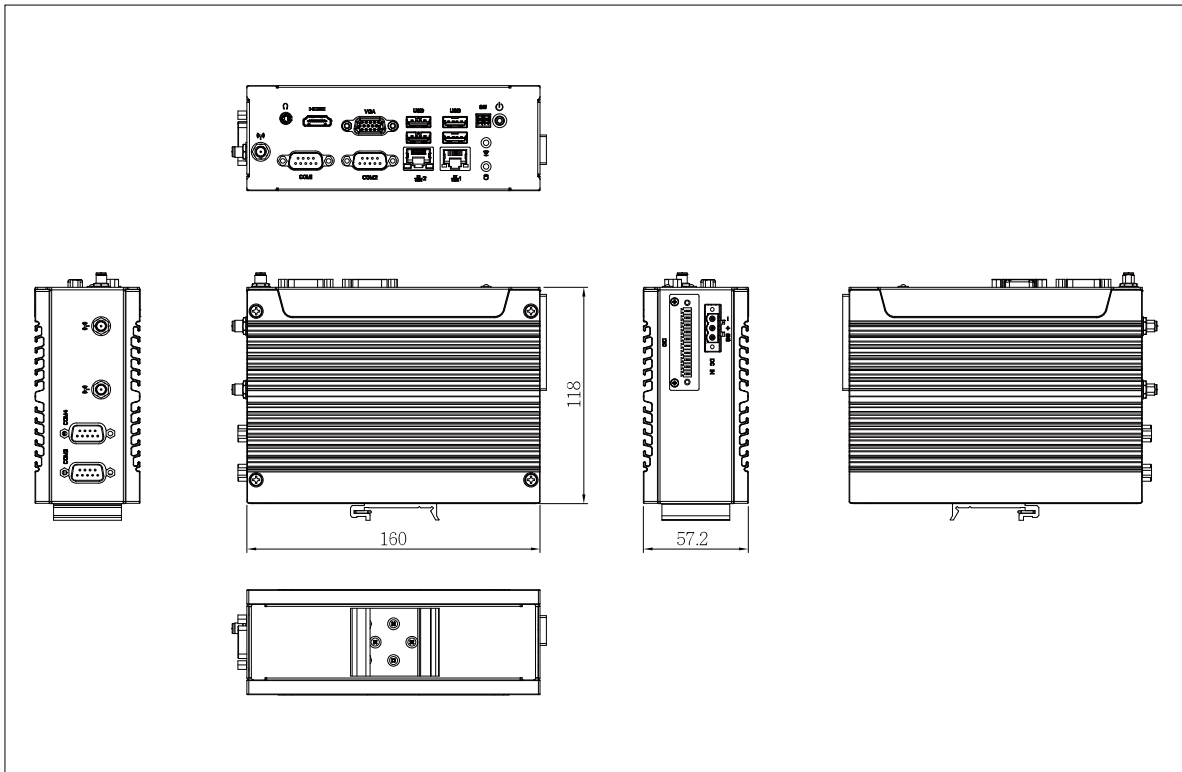

Packing Content

- Carton size: 416 x 409 x 347 (mm)
- Packing Capacity: 6pcs
- Including:
 - Terminal Blocks 1*3P x 1 (P/N: 25100-5ESDV0-D2R)
 - Terminal Blocks 1*2P x 1 (P/N: 25100-EC3500-D2R)
 - Terminal Blocks 1*10P x 1 (P/N: 25100-EC3810-D2R)
 - SATA cable x 1 (P/N: 25CF4-500500-S9R)
 - SATA power cable x 1 (P/N: 25CRI-190920-S9R)
 - HDD screw M3x4L x 4 (P/N: 25984G-1C014-S00)

Order Information

- System: 6BDR6412AMR-SI (Box packing)

2022/12/16

GIGAIPC reserves the right to modify or change technical data without prior notice.