

LED All-In-One Conference Screen

MW7218-T-163G

Overview

MW7218-T-163G is a 163-inch LED all-in-one conference screen developed by Uniview. It features super-large size, high brightness and low grayscale, and long lifetime. It integrates audio and video signal processor, providing a new conference room solution.



Features


- Built-in Android system, compatible with various apps.
- File manager allows to manage four kinds of files, including video, audio, image, and office document, convenient and efficient.
- Supports wireless screen sharing from Android, iOS, Mac OS, and Windows devices or supplied wireless screen sharing dongle, delivering high definition image, fast and efficient.
- Remote control realizes interaction between human and conference machine.

Specifications

Panel	Description
Size	163 inch
Pixel pitch	1.875
Display size	3600*2025
Resolution	1920*1080
Brightness (cd/m ²)	100 to 500, adjustable

Contrast ratio	10000:1 (GOB)
Refresh rate (Hz)	3840
Grayscale	14bit
Viewing angle (H/V)	170°/170°
Drive mode	Constant current (1/54)
Frame frequency	50/60Hz
General	Description
Product dimensions (W×H×D)(mm)	3612*2111*130 (with wall mount bracket); 3612*2631*827 (with floor stand)
Weight (kg)	154 (with wall mount bracket); 230 (with floor stand)
Mount method	Wall mount, mobile floor stand mount
Peak power consumption (W)	2800
Average power consumption (W)	930
Power supply	AC 100 to 240V, 50/60Hz
Operating temperature	-10°C to 40°C
Storage temperature	-10°C to 40°C
Operating humidity	10% to 75%
Storage humidity	10% to 75%
Accessories included	LED module, LED cabinet, all-in-one floor stand*1, vacuum sucker*1, wireless screen projector*1, Bluetooth remote control*1
Viewing distance (m)	≥ 1.8
Space usage (m ²)	60 to 90
System	Description
CPU architecture	Main frequency 1.8GHz, 64-bit 4-core processor
GPU	Mali G52
System version	Android 11(standard)
RAM	2GB (LPDDR4)
ROM	32GB
Video format	avi, mpg, vob, mov, mkv, rmvb, mp4, ts, flv
Audio format	MPEG-1/2 Layer I/II, AC-3, AAC-LC, WMA
Image format	jpg, bmp, png
Interface	Description
Input interface	1 x RJ45, 2 x HDMI, 1 x USB3.0, 5 x USB2.0, 1 x RS232
Output interface	1 x HDMI, 1 x Type-C, 1 x SPDIF, 1 x 3.5mm audio output
Speaker	Description
Speaker	2.0 sound channel
Rated output power	30

Dimensions

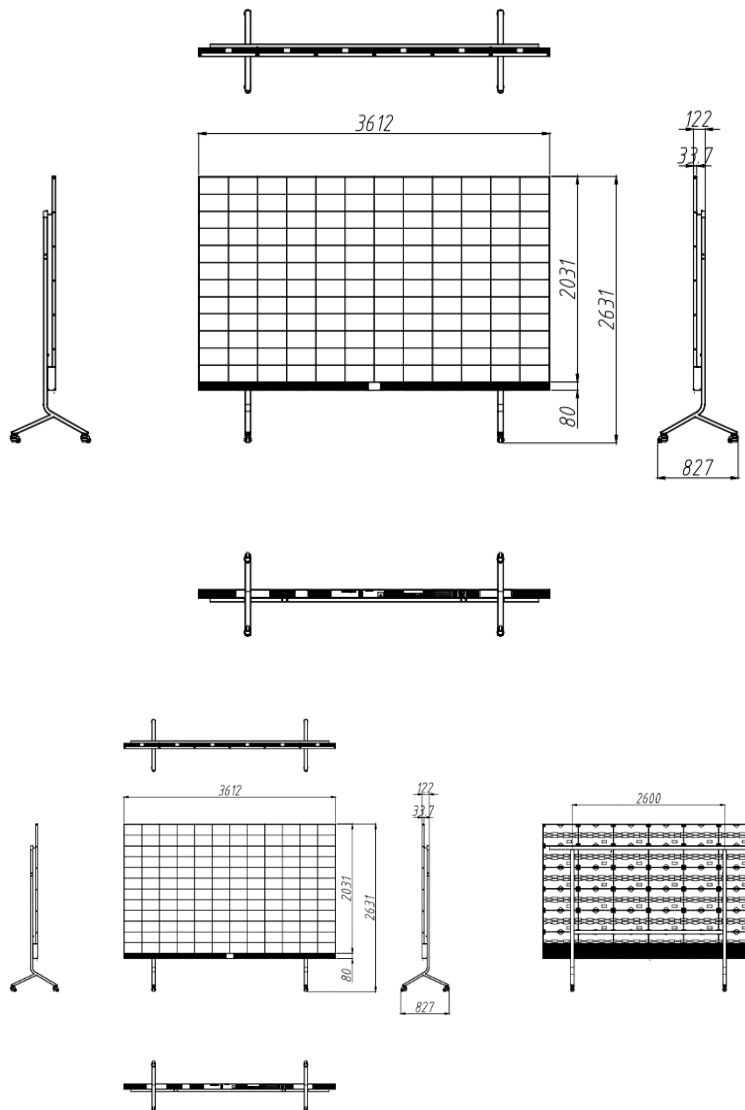

Ordering Information

Model	Description
MW7218-T-163G	LED All-In-One Conference Screen

Zhejiang Uniview Technologies Co., Ltd.

Xietong Street No. 369, Binjiang District, Hangzhou, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.