



Introduction

PIR series modules have the ability to detect infrared waves generated by the human body within a diameter of approximately 8 meters, with a coverage area of 360° for indoor motion detection. The modules can be configured to automatically switch on a light if motion is detected. The modules also contain a temperature and humidity sensor for measuring indoor temperature and humidity, or it can be configured to activate a fire alarm. A wide range of interface connections can be selected to suit individual needs, including RS-485/Ethernet/Wi-Fi, provide support for the DCON and Modbus RTU/TCP protocols, and can be easily integrated into existing HMI/SCADA/central control systems. A free Utility is also included that allows configuration information and data to be displayed in a powerful chart format that can be exported to Microsoft Excel.

The screw-free quick-connect connector and the DIP and rotary switches make the modules easy to install, repair, and maintain. The casing of each module is made from UL94-V2 rated fireproof material, and the white minimalist exterior design ensures that it is easy to match with interior decoration.

Applications

- Lighting and exhaust fans in public toilets
- Common lighting in staircases
- Lighting in parking areas

- Garden lights
- Lighting for changing rooms in shops
- Corridor lighting, and many more situations







Specifications

			1		
Model	PIR-230-E	PIR-230-WF	PIR-231-E	PIR-231-WF	
EMS Protection					
EFT (IEC 61000-4-4)	±4 kV for Power Line				
ESD (IEC 61000-4-2)	\pm 4 kV Contact for each Terminal, \pm 8 kV Air for Random Point				
LED Indicators					
Status	Yes,1	as Power/Communication	Indicator. 1 as Alarm Ind	icator.	
PIR					
Detection Height	4 m	Max.	10 m	n Max.	
Detection Field of View		360°; 8 m Di	iameter Max.		
Lux Control Level	Hardware: 2 modes (Dawn and dust) / Software: 5-step		-		
Delay Time	Hardware: 8-step Switch- Software: 16-step (secon	Hardware: 8-step Switch-selectable (seconds): 6, 16, 33, 66, 131, 262, 524, 1049 Software: 16-step (seconds): 2, 4, 6, 8, 16, 33, 49, 66, 131, 262, 393, 524, 1049, 2097, 3146, 4194			
PIR Response Time	1 second				
Temperature Measurement					
Fire Alarm	-40 ~ +120°C				
Range		65°C (Programmable)			
Resolution	0.01°C				
Accuracy	±0.5°C (at 0 to 60°C)				
Humidity Measurement		`	,		
Range		0 to 100% RH			
Resolution	0.01% RH				
Accuracy	±5% RH				
Wi-Fi					
Transmission Distance (LoS)	_	50 m (LOS)		50 m (LOS)	
Standard Supported	-	Wi-Fi: IEEE 802.11 b/g/n		Wi-Fi: IEEE 802.11 b/g/n	
Mode		Infrastructure/Limited AP		Infrastructure/Limited AP	
	-		-		
Encryption	-	WEP, WPA ,WPA2	-	WEP, WPA ,WPA2	
Digital Input			<u></u>		
Channels	2				
Туре	Wet Contact				
On Voltage Level		70 to 220 VAC			
Off Voltage Level	20 VAC Max.				
Input Impedance		68 KΩ, 1 W			
Relay Output					
Channels	1				
Туре	Power Relay, Form C				
Contact Rating	NO: 10 A @ 250 VAC / NC: 6 A @ 250 VAC				
Number of Lighting Fixture	Incand	escent Bulb: 1500 W Max.	; Fluorescent Lamp: 300 \	N Max.	
COM Ports					
Ports		RS-485 X 1 and Ethernet/PoE X1			
Baud Rate	12	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200			
Protocol	DCON, Modbus RTU, Modbus TCP, MQTT				
Node Address		Hardware: 160 to 191 / Software: 1 to 255			
Power					
Reverse Polarity Protection		Y	es		
Input Range	18 to 48 VDC, PoE				
Consumption	2 W	3 W	2 W	3 W	
Mechanical		I	I		
Dimensions (mm)		Ø150 × 5	53 (Ø x H)		
Installation	Ceiling /surface mounted				
Ingress Protection Rating	IP20				
Environment					
Operating Temperature		0 to 1	-35°C		
Storage Temperature	0 to +35°C -30 to +80°C				
Humidity	10 to 90% RH, Non-condensing				



Operating Distance

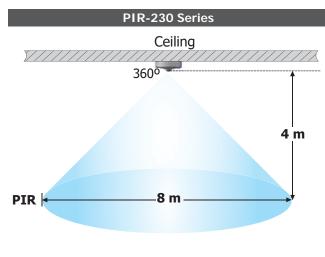


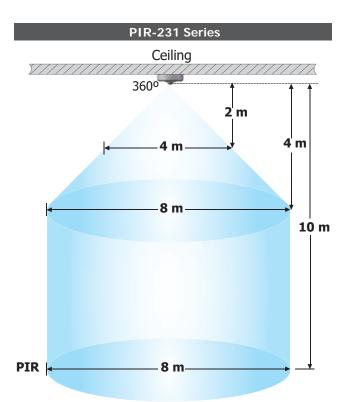

DIP Switch Settings

<u>___</u>2 SW1 ON OFF DCON Modbus 1 2 SW Config. HW Config. ە 🗖 -SW1 шı 3 High Node Low Node INIT 4 Run ۳ \square 5* Dawn Dust Z⊡⊣ 6* Sensitivity □ 4 7* ۳ 8 \square Z⊡⊣ 9 **ON Time Control** 10 $(\hat{\mathbf{I}})$ Address * (5, 6, 7 for PIR-230 Series Only)

Pin Assignments

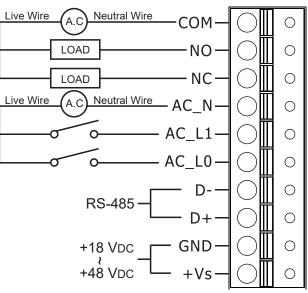


Mounting






Wall Mounting (+ External Wall Box EWB-C150)

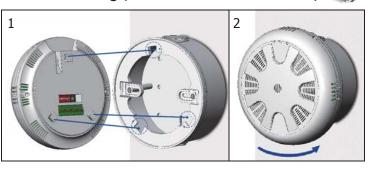

Dimensions (Units: mm)

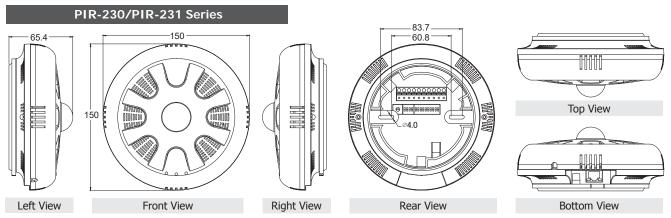

Ordering Information

PIR-230-E CR	PIR Motion Sensor, Temperature and Humidity Sensor Module (Ethernet) (RoHS)
PIR-230-WF CR	PIR Motion Sensor, Temperature and Humidity Sensor Module (WiFi) (RoHS)(Asia Only)
PIR-231-E CR	PIR Motion Sensor, Temperature and Humidity Sensor Module (Ethernet) (RoHS)
PIR-231-WF CR	PIR Motion Sensor, Temperature and Humidity Sensor Module (WiFi) (RoHS)(Asia Only)

Accessories

EWB-C150	External Wall Box for PIR-200 series
CA-RJ45-04	RJ45 Cable, Male-Female, 30cm